

FIG. 1

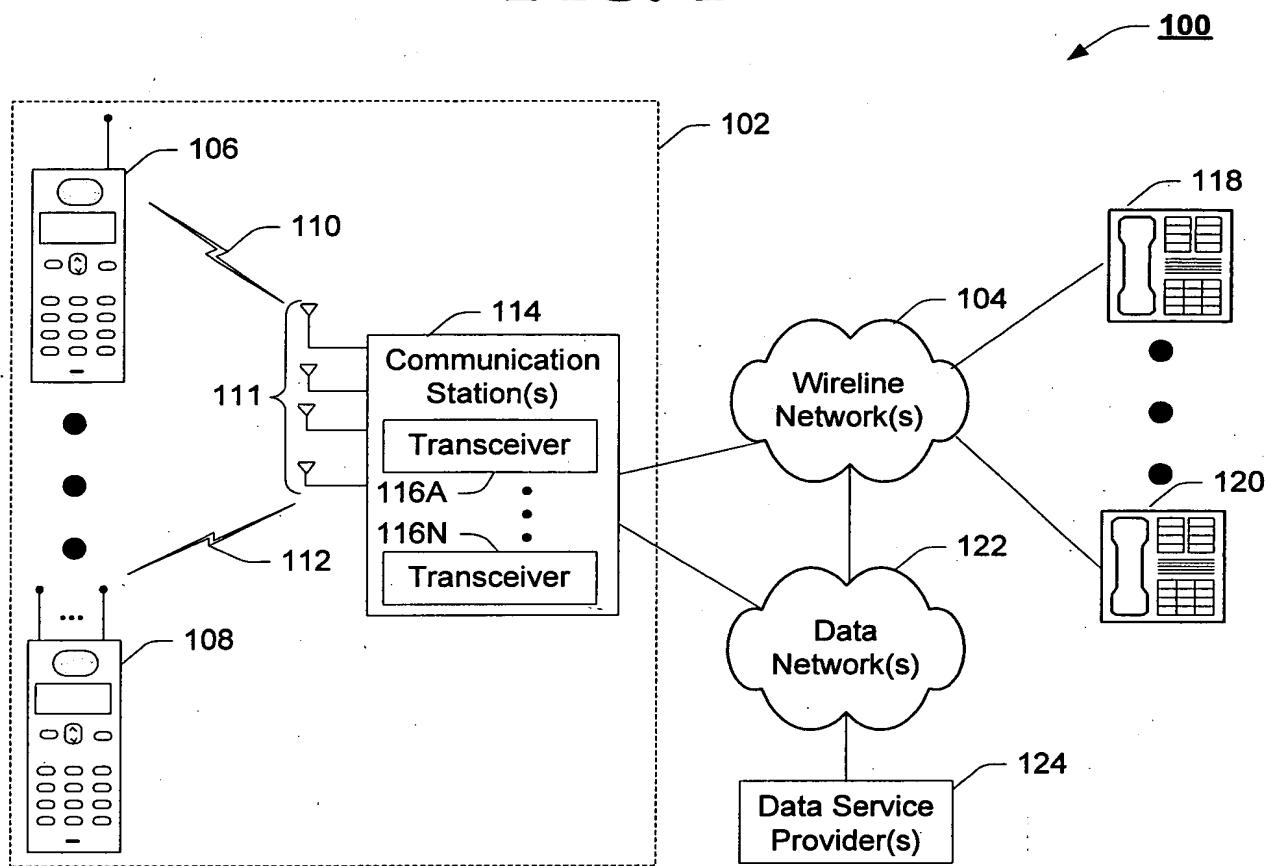


FIG. 2

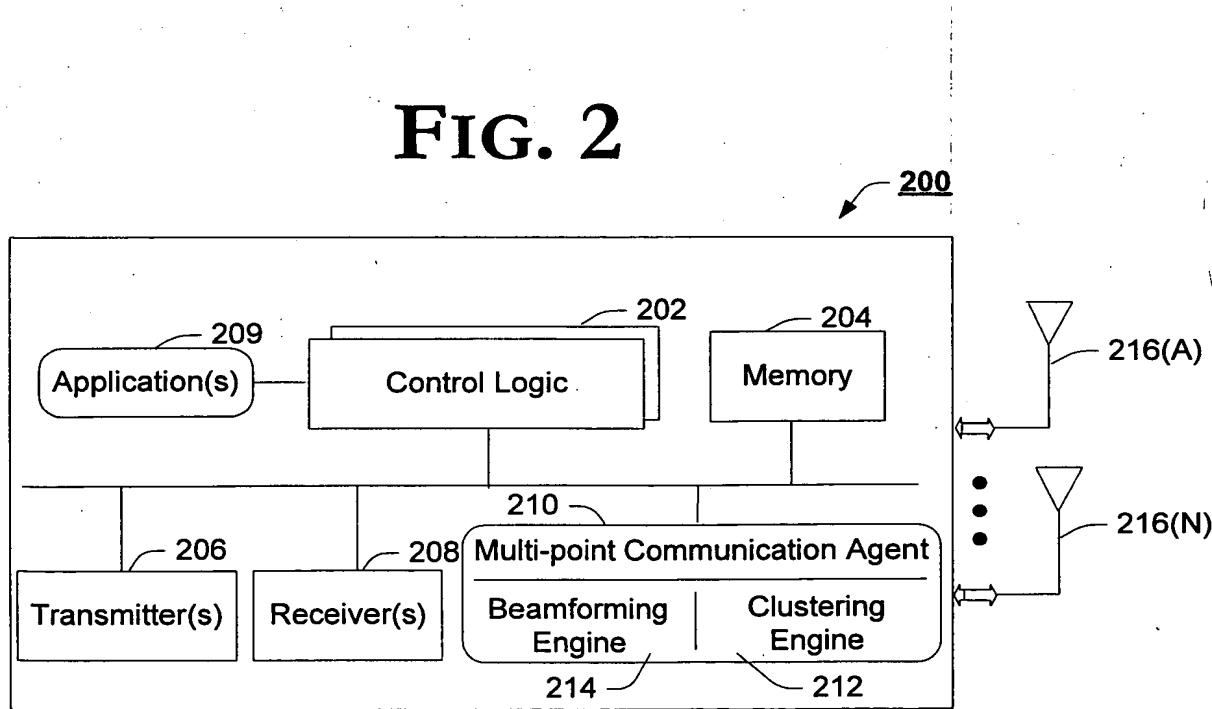


FIG. 3

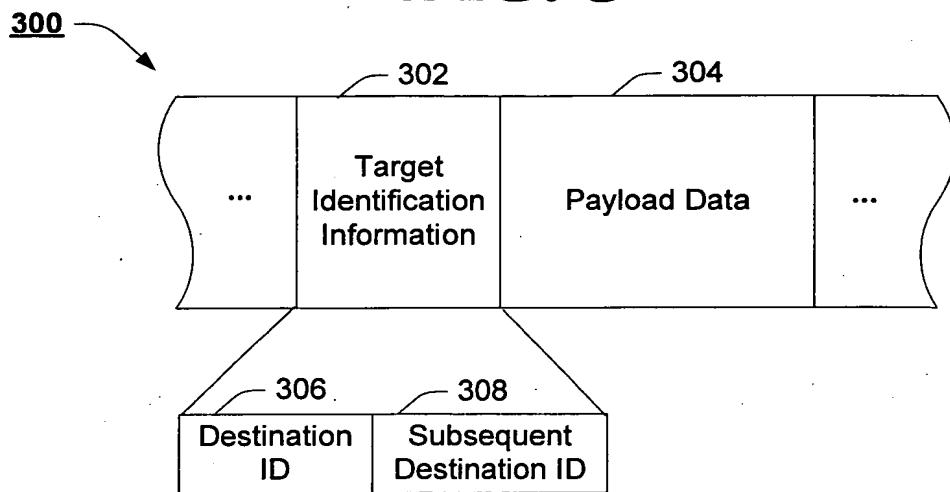


FIG. 4

A table showing parameters for multiple targets. The columns are labeled: Target, Cluster, Attenuation, Phase, and Sp. Sig. The rows are numbered 1 through n. The table is enclosed in a rectangular frame with labels 412, 402, 404, 406, 408, and 410 at its corners. A curved arrow points from the label 400 to the top right corner of the frame.

Target	Cluster	Attenuation	Phase	Sp. Sig.
1	nnnn	.65	22.2	SS1
2	nnnn	.45	12.2	SS2
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
n	aaa	1.0	35.2	SSn

FIG. 11

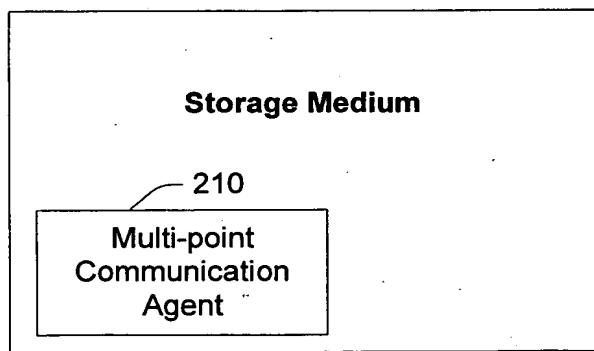


FIG. 5

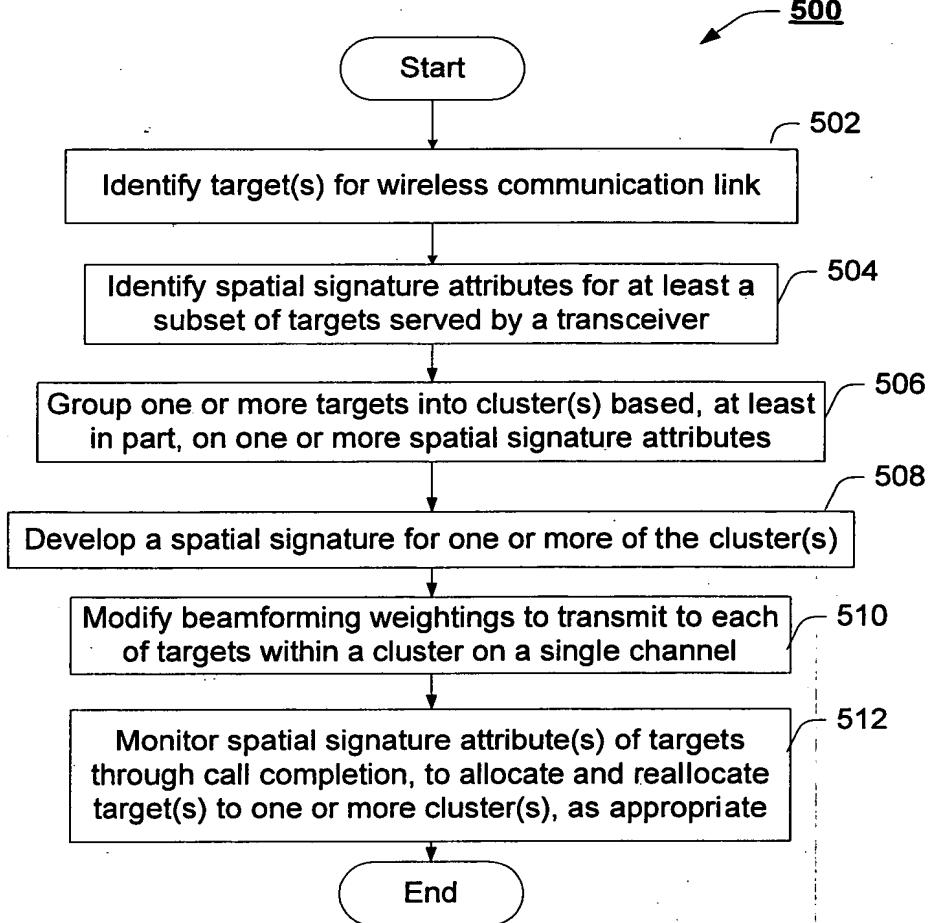


FIG. 6

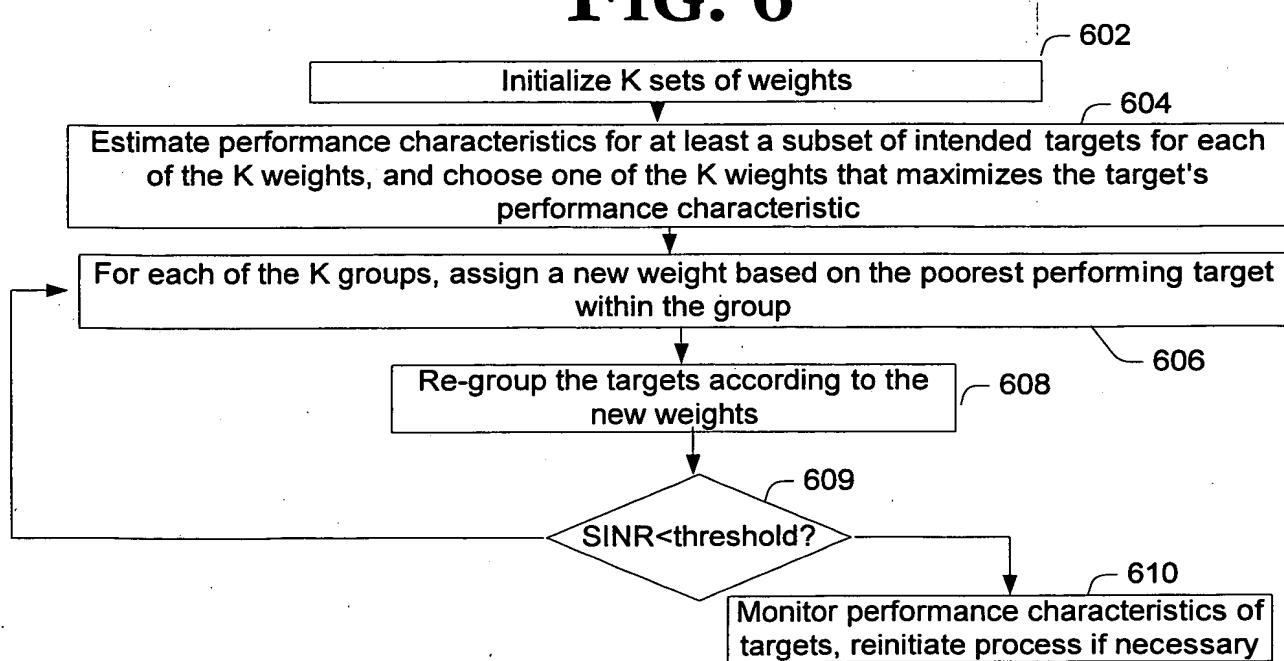


FIG. 7

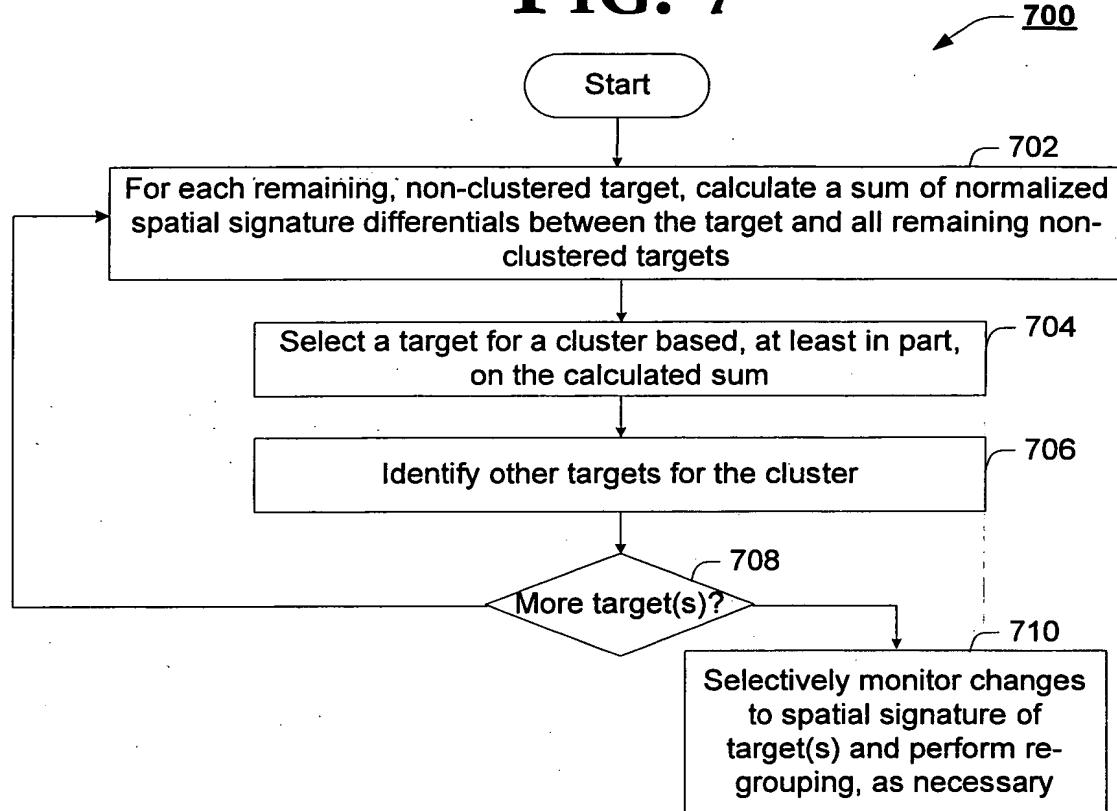


FIG. 8

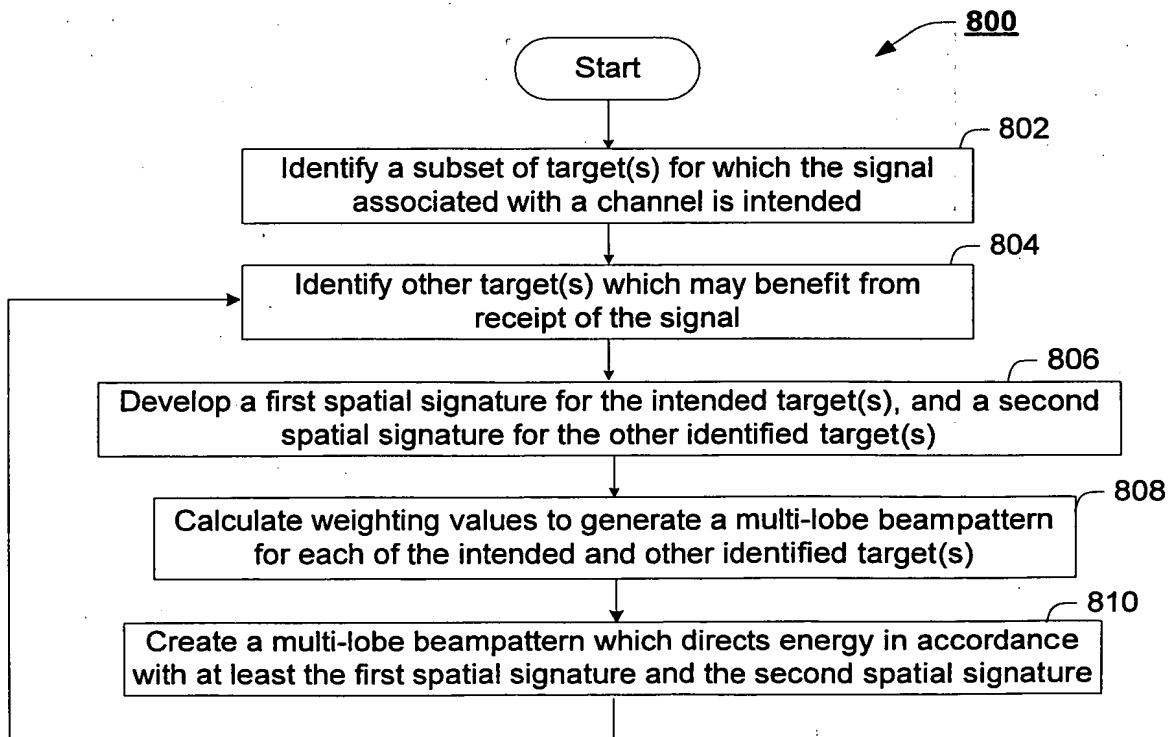


FIG. 9

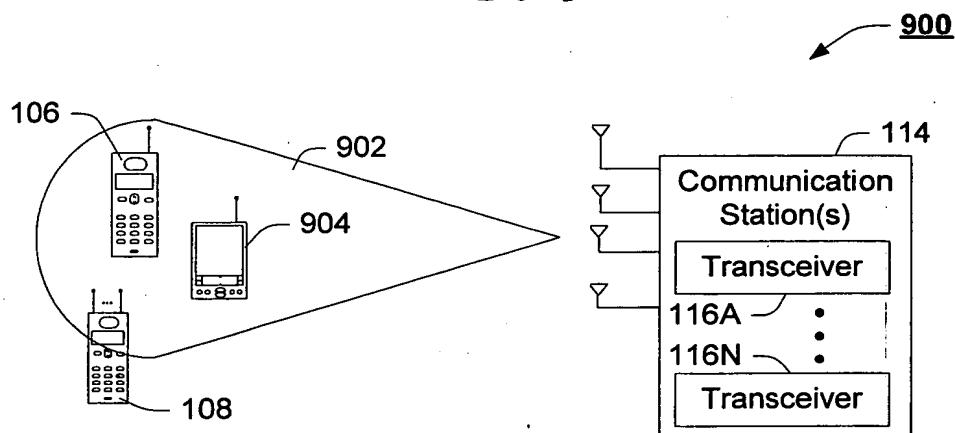


FIG. 10

